

4000 LT WATER PUMP LOW PRESSURE

General Features

- › Low pressure pump
- › Compatible with a wide range of modifications
- › Complies with EN 1028 standards
- › Maintenance-free mechanical seal and vacuum pump
- › Lightweight alloy, high quality anodized aluminum body
- › Suitable mounting design for vehicles all over the world
- › High performance automatic suction system
- › Low pressure with single stage aluminum fan
- › Low sound level
- › Hot water tank for use in cold climates
- › Thermal drain valve 72°C




Technical Specifications

4000 LT SERIES SP-010-4000

SP-010-4000

Low Pressure Flow Rate	4000 l/min (1056 gpm)
High Pressure Flow Rate	-
Normal Pressure	10 bar (145 psi)
Normal Pump Speed	3000 rev/min (rpm)
Maximum Pump Speed	3200 rev/min (rpm)
Minimum Idle Speed	700 rev/min (rpm)
Minimum Suction Speed	2400 rev/min (rpm)
Maximum Suction Speed	3600 rev/min (rpm)
Maximum Pressure	17 bar (246 psi)
Suction Speed, 7.5 m depth	30 seconds
Operating Temperature	-15 °C (5°F) / +55 °C (131 °F)
Thermal Drain Valve	72 °C (161 °F)
Power (KW)	130 KW
Weight	98 Kg
Dimensions (LxWxH) mm	542 x 484 x 553 mm

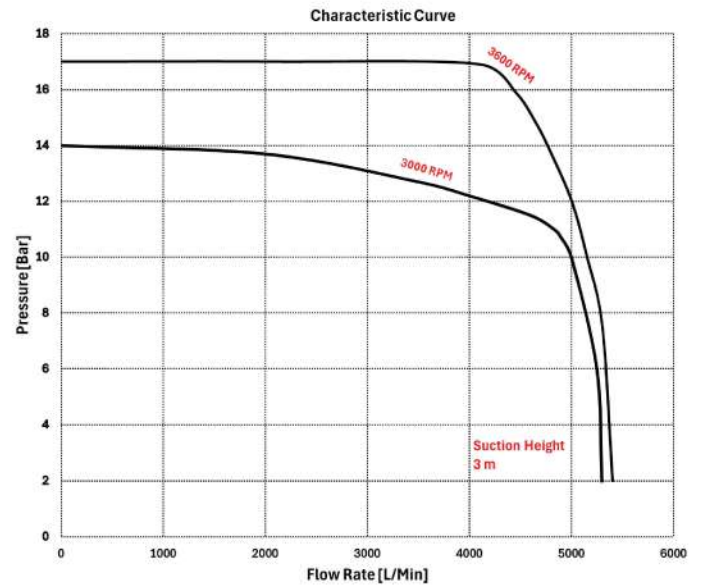

Strong &
Reliable

