KOZANOĞLU
KOZMAKSAN

4000 LT WATER PUMP
LOW PRESSURE

General Features

- Low pressure pump
- Compatible with a wide range of modifications
- Complies with EN 1028 standards
- Maintenance-free mechanical seal and vacuum pump
- Lightweight alloy, high quality anodized aluminum body
- Suitable mounting design for vehicles all over the world
- High performance automatic suction system
- Low pressure with single stage aluminum fan
- Low sound level
- Hot water tank for use in cold climates
- Thermal drain valve 72°C






KOZANOĞLU
KOZMAKSAN

FIRE TRUCK EQUIPMENT


Technical Specifications

4000 LT SERIES
SP-010-4000

	SP-010-4000
Low Pressure Flow Rate	4000 l/min (1056 gpm)
High Pressure Flow Rate	-
Normal Pressure	10 bar (145 psi)
Normal Pump Speed	3000 rev/min (rpm)
Maximum Pump Speed	3200 rev/min (rpm)
Minimum Idle Speed	700 rev/min (rpm)
Minimum Suction Speed	2400 rev/min (rpm)
Maximum Suction Speed	3600 rev/min (rpm)
Maximum Pressure	17 bar (246 psi)
Suction Speed, 7.5 m depth	30 seconds
Operating Temperature	-15 °C (5°F) / +55 °C (131 °F)
Thermal Drain Valve	72 °C (1 61 °F)
Power (KW)	130 KW
Weight	98 Kg
Dimensions (LxWxH) mm	542 x 484 x 553 mm

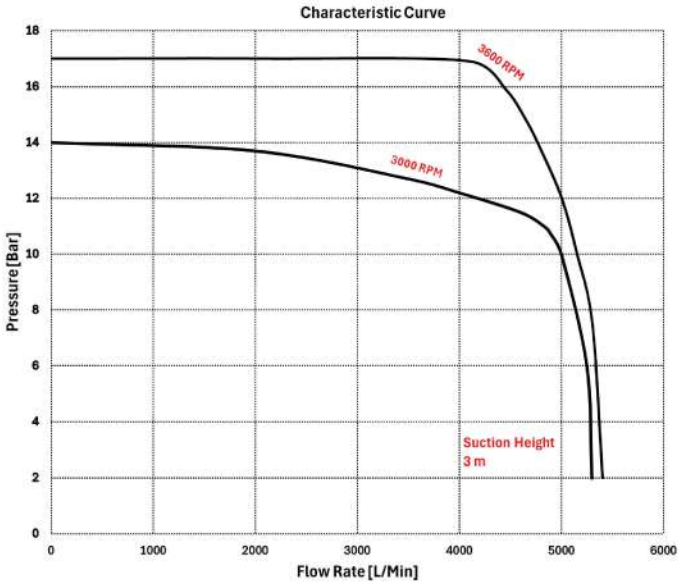

Strong &
Reliable

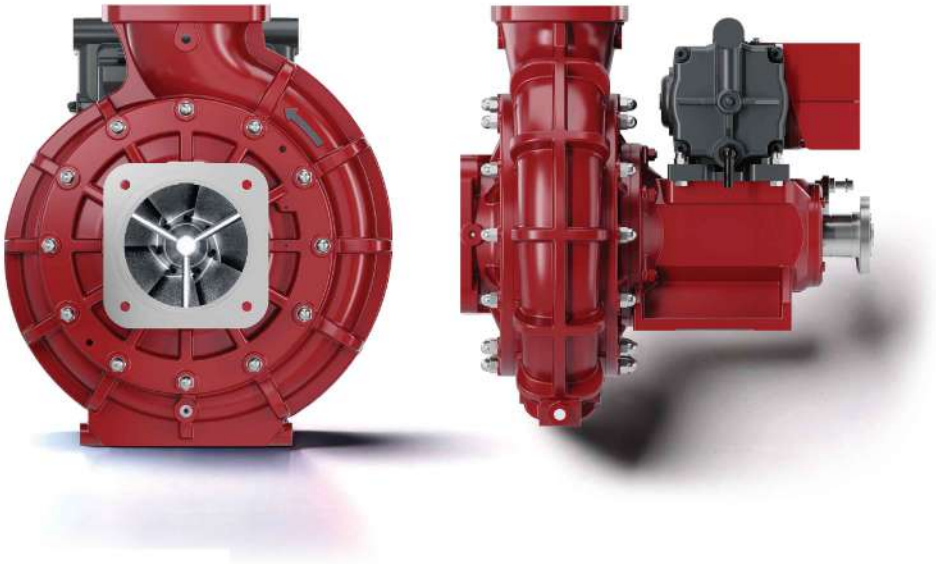

KOZANOĞLU
KOZMAKSAN

TS EN 1028, Iso 9001, Iso 14001, Iso 18001, CE ve Gost-R

YERLİ ÜRETİM

www.kozmaksan.net