
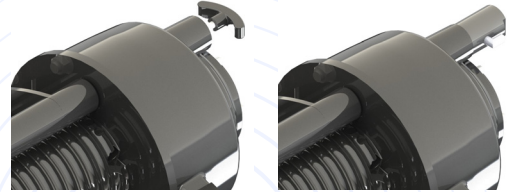
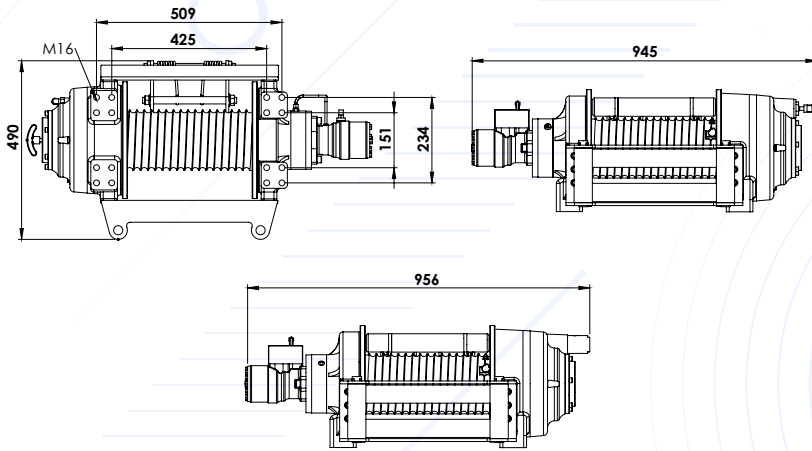


- High-strength, long-lasting steel body
- Extra reinforced planetary gear system with special steel heat treatment
- Lightweight and powerful design
- 100% negative effective hydraulic disc brake system
- Standard winch guide system and rope stabiliser
- Manual winch discharge system provided as standard
- High torque hydromotor

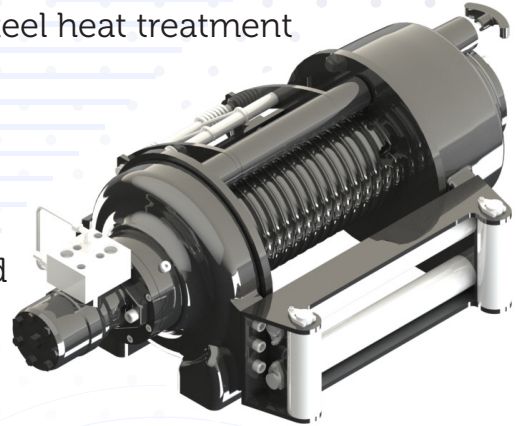

Pneumatic Rope release (optional)

| Rope Winding Count | Pulling Capacity kg | Winding Speed m-min/(ft-min) | Rope Length m/ft |
|--------------------|---------------------|------------------------------|------------------|
| 1                  | 15000               | 5/16                         | 7,5/24           |
| 2                  | 12580               | 5,6/18                       | 17/55            |
| 3                  | 10825               | 6,2/20                       | 28/91            |
| 4                  | 9500                | 6,8/22                       | 42/137           |

|                                      |                                |
|--------------------------------------|--------------------------------|
| Maximum Pulling Force (kg/lbs)       | : 15.000 kg (33.000 lbs)       |
| Maximum Rope Diameter (mm/in)        | : 18mm (45/64")                |
| Maximum Rope Length (m/ft)           | : 42 m (137 ft)                |
| Hydromotor (cc/in <sup>3</sup> )     | : 200 cc (12 in <sup>3</sup> ) |
| Maximum Pump Flow (L/min-g min)      | : 60L (15.8 gal)               |
| Gear Ratio                           | : 36/1                         |
| Maximum Operating Pressure (bar/psi) | : 165 bar (2393 psi)           |
| Recommended Gear Oil Product         | : 80 w 90 - 2 L                |
| Weight                               | : 195 kg (429 lbs)             |