
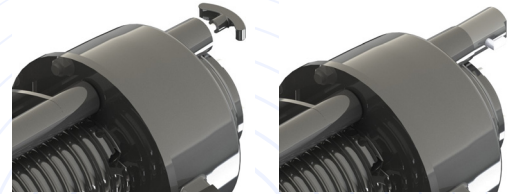
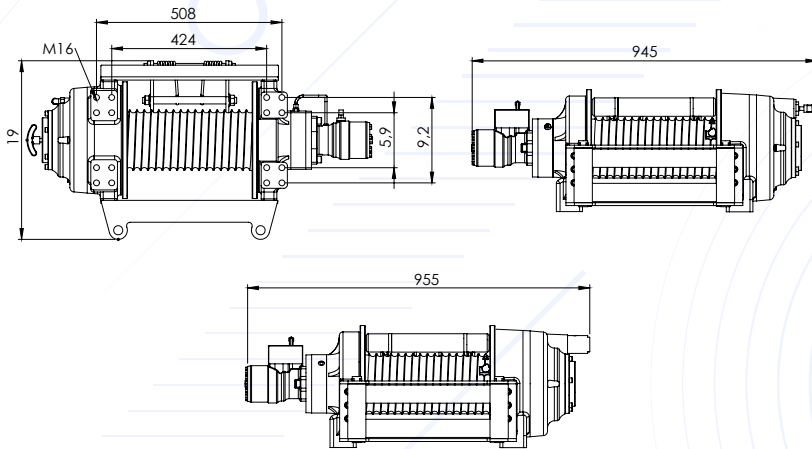


- High-strength, long-lasting steel body
- Extra reinforced planetary gear system with special steel heat treatment
- Lightweight and powerful design
- 100% negative effective hydraulic disc brake system
- Standard winch guide system and rope stabiliser
- Manual winch discharge system provided as standard
- High torque hydromotor

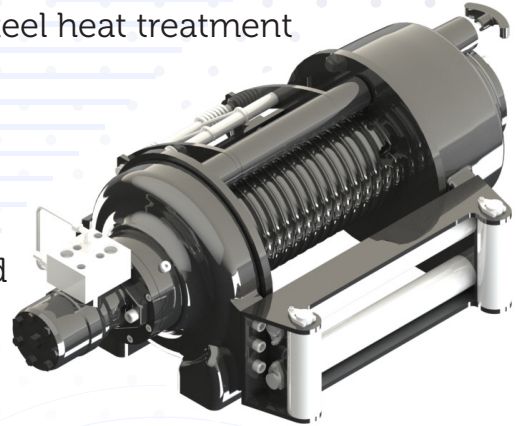

Pneumatic Rope release (optional)

Rope Winding Count	Pulling Capacity kg	Winding Speed m-min	Rope Length m
1	18000	5	7,5
2	15121	5,6	17
3	13011	6,2	28
4	10172	6,8	42

Maximum Pulling Force (kg)	: 18.000 kg (40.000 lbs)
Maximum Rope Diameter (mm)	: 18mm (45/64")
Maximum Rope Length (m)	: 42 m
Hydromotor (cc)	: 250 cc (15 in ³)
Maximum Pump Flow (L/min)	: 60L (15.8 gal)
Gear Ratio	: 36/1
Maximum Operating Pressure (bar)	: 165 bar (2393 psi)
Recommended Gear Oil Product	: 80 w 90 - 2 L
Weight	: 195 kg (429 lbs)