
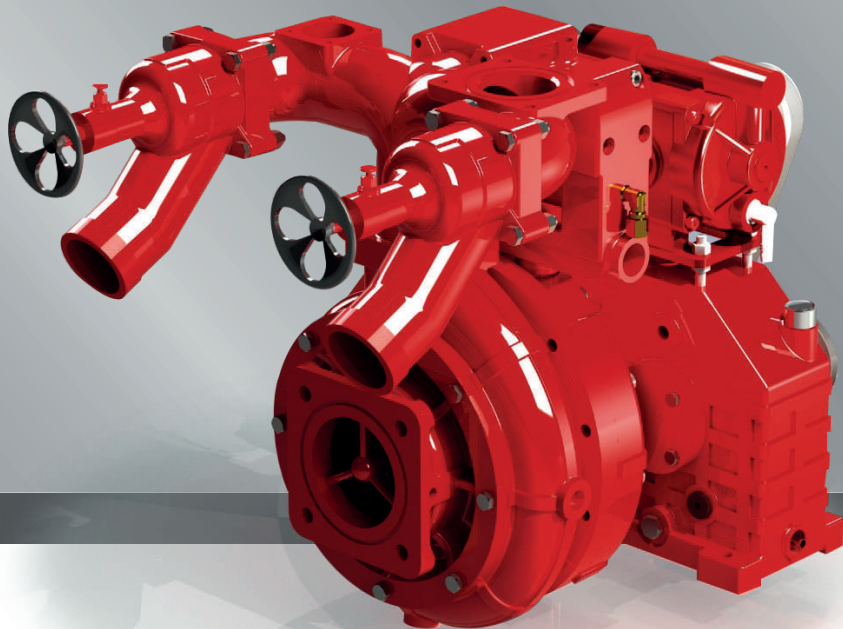

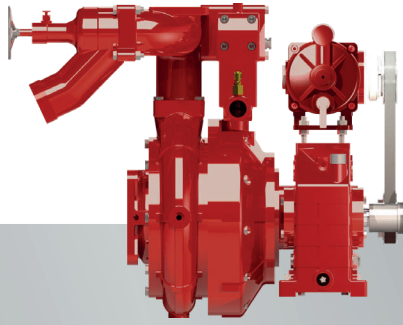


SP-010-1500-040-250

Normal & High Pressure Pump
for Fire Truck

SP-010-1500-040-250

Normal & High Pressure Pump for Fire Truck



General Features

EN – 1028 Certificate

Light Alloy High Quality Aluminum

Thermal Expulsion System

Mechanical Stuffing Impermeability

Automatic Suction System

High Pressure by-pass system

Single Stage Aluminum Blower Low Pressure

Single Stage Brass Blower High Pressure

Low-Level Sound

Brass Bedding from 2 points

Optionals

Foam Estimator

Multi Outlet Collector

High Pressure Distributor

Pump Control Panel With Changeable Options

Changeable Coupling Options

Technical Features

Type

SP-010-1500-040-250

Rotation

3000 rpm - 3400 rpm

Norm. Flow Rate

1500 lt./min.

High Flow Rate

250 - 400 lt./min.

Norm.Pressure

10 - 15 bar

High Pressure

40 bar

Running Temp.

-15°C / +55°C

Stage


2

In / Out


4" / 2,5"

Graphic


Pressure (Bar) Pump Low Pressure Graphic

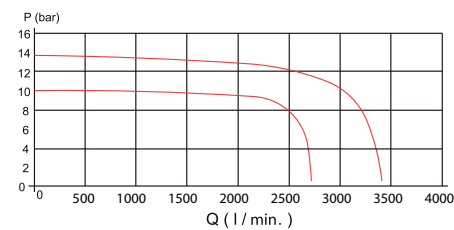

Pressure (Bar) Pump High Pressure Graphic

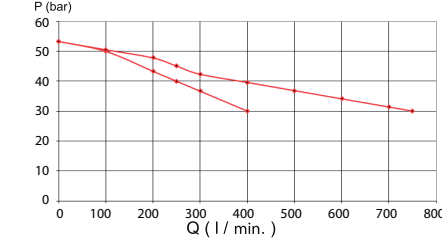

Pressure(Bar) Pump Vacuum Graphic

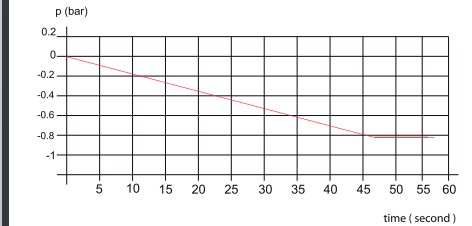

Dimensions

