

KOZANOĞLU KOZMAKSAN

Horizontal Split Shaft PTO

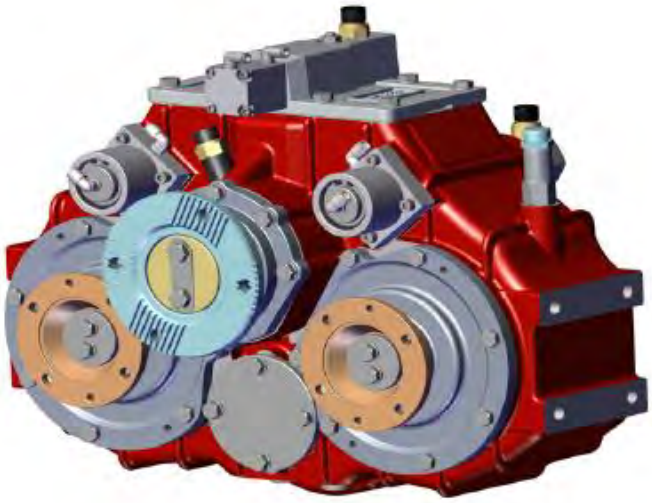

- Horizontal Transfer Case / Split Shaft PTO
- Pneumatic shifter

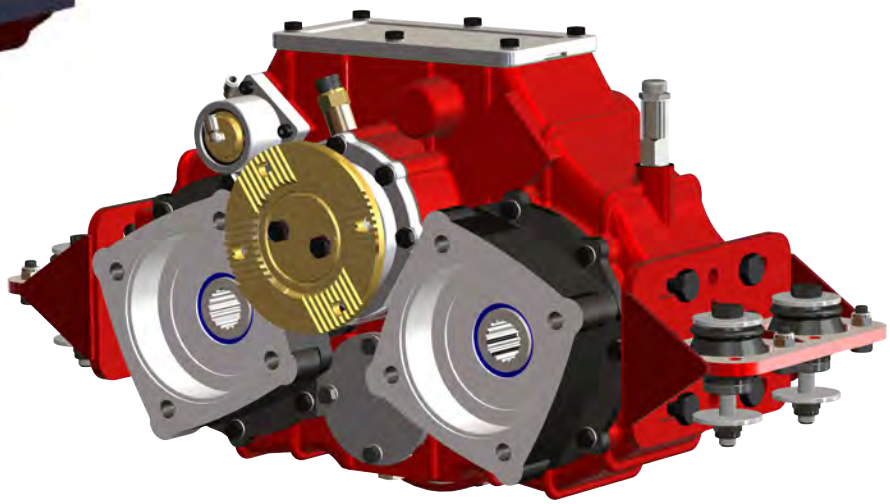

PERFORMANCE

	UARA.2401 - UARA.2402
Axis Count 3 Stage Max Power HP – Each Side Output Shaft	200
Max Torque (Intermittent) – INPUT SHAFT (1) & (2)	22,125 lb. Ft
Max Torque (Continues) – INPUT SHAFT (1) & (2)	14,750 lb.
Ft Speed Ratio – INPUT SHAFT (1) & (2)	1:1
Weight – Approx.	420 lb.
Max Speed – INPUT SHAFT (1) & (2)	3000 RPM
Pump & Roll	Only on UARA.2402

UARA.2401 MODEL NUMBER CONSTRUCTION

UARA.2401 – 02–D18–-**-**- ** - **- X**

Uara.2401series

Uara.2402 series

Code	Speed Ratio (3)/(1-2)	Speed Ratio (4)/(1-2)
02	1.25	1.25
07	1.7	1.7

Code	Drive Flange (1) & (2)
D18	DIN180
CF	Custom Request

Code*	Pump Pad-3L
SBB2	SAE-BB
SD4	SAE-D
S14	SAE1410 Flange

Code*	Pump Pad-3R
SBB2	SAE-BB
SD4	SAE-D
NN	BLANK


Code	RPM Counter	Temp Sensor
X	---	---
R	•	---
RT	•	•
RTP	•	•


Code*	Pump Pad-4L
SBB2	SAE-BB
SD4	SAE-D
S14	SAE1410 Flange


Code*	Pump Pad-4R
SBB2	SAE-BB
SD4	SAE-D
SB2	SAE-B

* Please refer to pump pad table on page 3 for all possible configurations.

DIMENSIONS & Standard Components – U2401/U2402

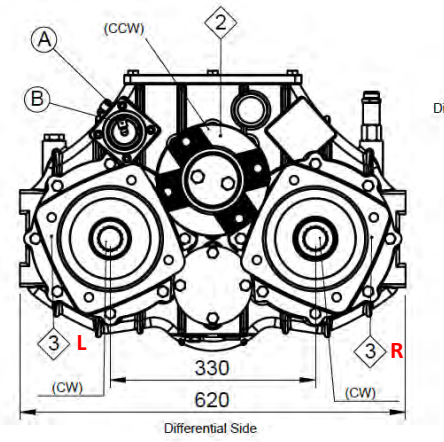

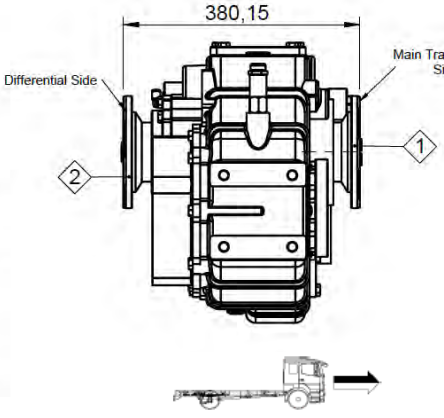


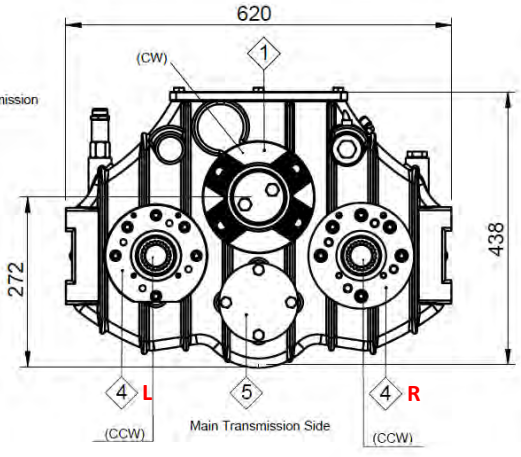


Pump pad configurations – UARA.2401 / UARA.2402

		3L	3R	4L	4R	Code
DIN5462	ISO 4-bolt	✓	✓	✓	✓	DIN
SAE-B	2-Bolt	✓	✓	✓	✓	SB2
SAE-B	4-Bolt	✓	✓	✓	✓	SB4
SAE-BB	2-Bolt	✓	✓	✓	✓	SBB2
SAE-BB	4-Bolt	✓	✓	✓	✓	SBB4
SAE-C	2-Bolt	✘	✘	✓	✓	SC2
SAE-C	4-Bolt	✓	✓	✓	✓	SC4
SAE-CC	2-Bolt	✘	✘	✓	✓	SCC2
SAE-CC	4-Bolt	✓	✓	✓	✓	SCC4
SAE-D	2-Bolt	✘	✘	✘	✘	SD2
SAE-D	4-Bolt	✓	✓	✘	✘	SD4
SAE 1310/1410/1510		✓	✓	✓	✓	S13/S14/S15

Note: Location 5 can only accept group 1P1 and 2P1 gear pumps.

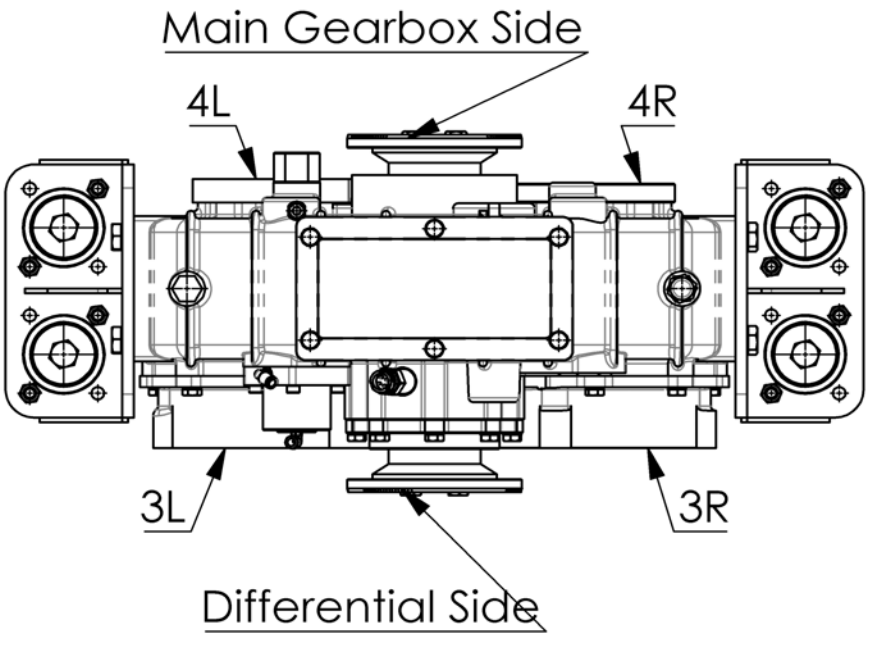

Power Flow Diagram – U2401

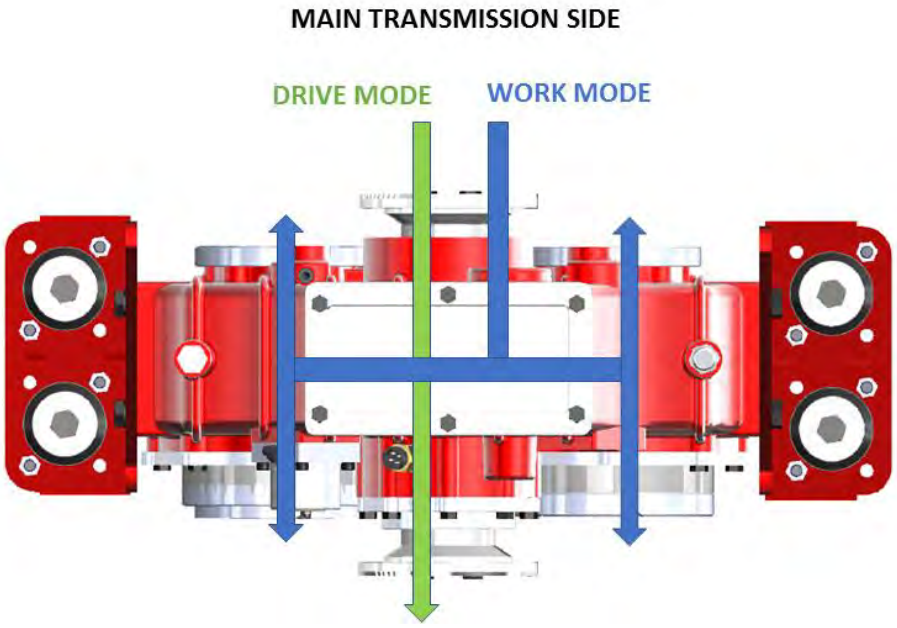

Power Flow Diagram – U2402

